




FIXTURE TYPE: _____

PROJECT NAME: _____

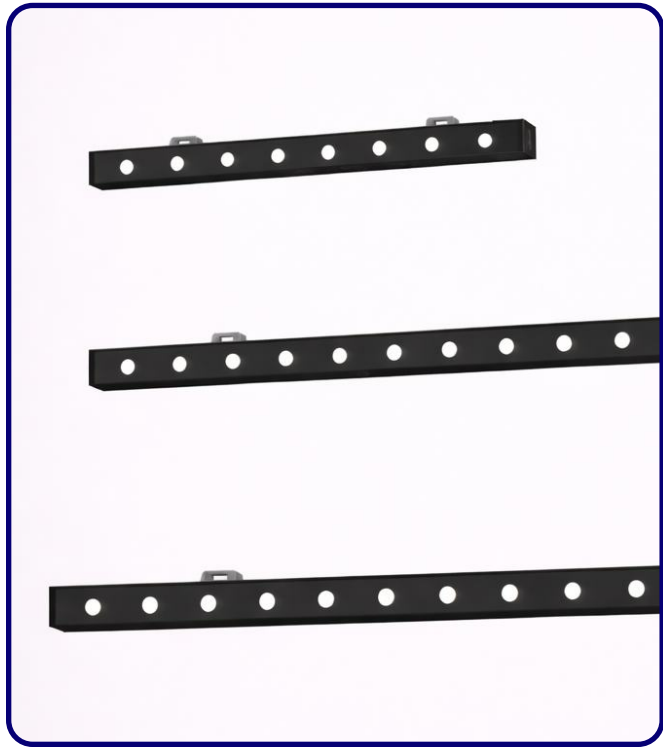

GENERAL INFORMATION:

The GLINT Linear Wall Washer by Bullard Outdoor is a precision-engineered fixture designed for even and powerful architectural illumination. Constructed from extruded aluminum with a durable powder-coated finish, it offers excellent thermal performance and long-term resistance to outdoor conditions. The tempered glass lens (T=3mm) ensures durability and consistent light output, while the LED system delivers efficient, high-quality illumination with a CRI of 80. Operating on a 110–277V universal input, the GLINT is rated IP65 for full weather protection and IK05 for impact resistance. This linear wall washer is ideal for modern facades and accent lighting — embodying Bullard Outdoor’s promise of reliability and style, Built for the Storm.

FIXTURE TYPE:

Linear Wall Washer

LIGHTING

LED

LED

VOLTAGE:

110-277V



MATERIAL:

Extruded aluminum anodized finishing

LENS:

Tempered Glass.T=3mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 05

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____


PROJECT NAME: _____

NOTES:


-B6JD0656

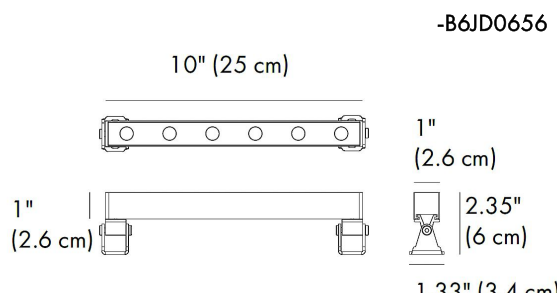

-B6JD1256

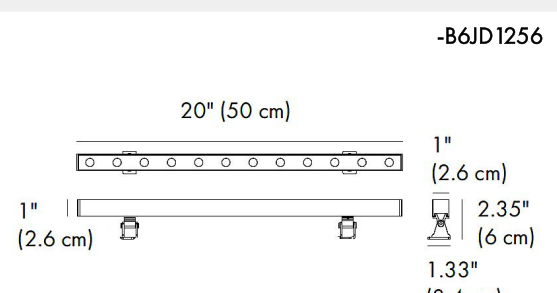

-B6JD2456

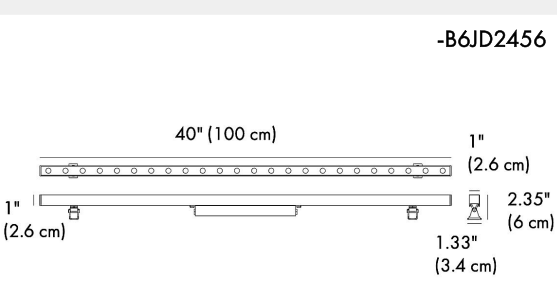



HOW TO ORDER: _____ **CODE:** _____

Example:
CODE: BO-GLNT-KPG-WW-XXX-XXX-XXX-XXX-

BO-GLNT-KPG-WW-
B6JD0656-K30-B38-30-
DIM-6004#

1 MODELS: _____

CODE -B6JD0656

DIMENSIONS:

Length - L: 10" (25 cm)
Width - W: 1.33" (3.4 cm)
Height - H: 2.35" (6 cm)

LIGHT SOURCE:

LED / 6 × 1W / 300 mA / 410 lm / 110-277V

CODE -B6JD1256

DIMENSIONS:

Length - L: 20" (50 cm)
Width - W: 1.33" (3.4 cm)
Height - H: 2.35" (6 cm)

LIGHT SOURCE:

LED / 12 × 1W / 610 mA / 950 lm / 110-277V

CODE -B6JD2456

DIMENSIONS:

Length - L: 40" (100 cm)
Width - W: 1.33" (3.4 cm)
Height - H: 2.35" (6 cm)

LIGHT SOURCE:

LED / 24 × 1W / 1220 mA / 1660 lm / 110-277V

2 CCT OPTIONS: _____

-K30 3000K
-CUS Custom on request*

3 BEAM ANGLE: _____

-B38-30 30° -B38-1530 60°
-B38-40 40° -B38-1445 25° x 50°
-B38-50 50°

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

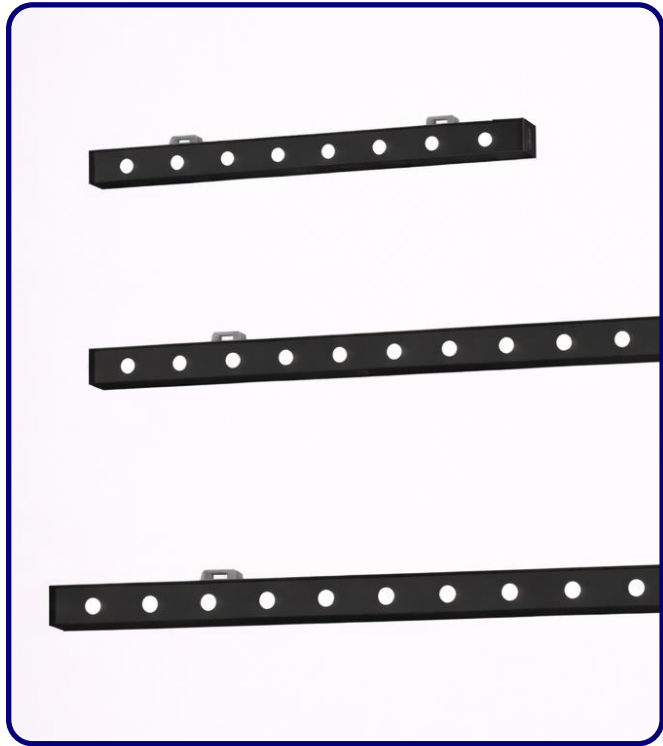

HOW TO ORDER:

CODE:

Example:
CODE: BO-GLNT-KPG-WW-XXX-XXX-XXX-XXX-


BO-GLNT-KPG-WW-
B6JD0656-K30-B38-30-
DIM-6004#

4 DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


5 ACCESSORIES: (optional)

-6004# Anti Glare Louver 

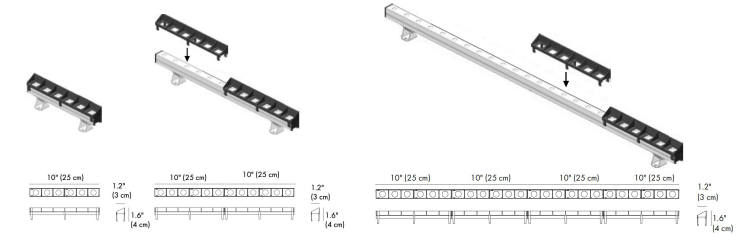

6 WATER PROOF SOLUTION (Included)

-B IP67 Jiffy quick plug/socket connector
(low voltage)




A. IP67 Jiffy quick plug/socket connector(included)


7 CONNECTION:

LOW VOLTAGE INPUT (DC24) POWER CABLE TYPE

LTPS type

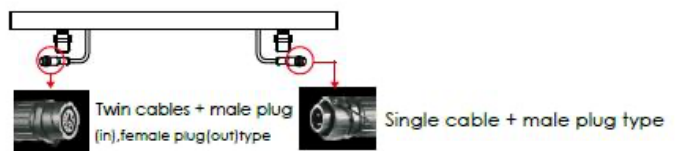

•Low voltage input default: LTPS type power cable with conducted input and output, waterproof socket connector are included.



sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

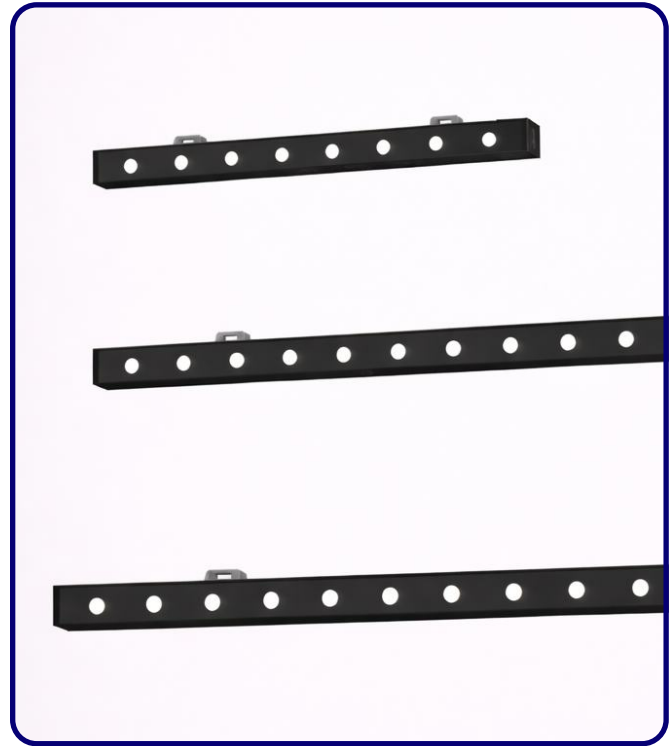


HOW TO ORDER:

CODE:

Example:
CODE: BO-GLNT-KPG-WW-XXX-XXX-XXX-XXX-

BO-GLNT-KPG-WW-
B6JD0656-K30-B38-30-
DIM-6004#

8 PHOTOMETRIC INFO:

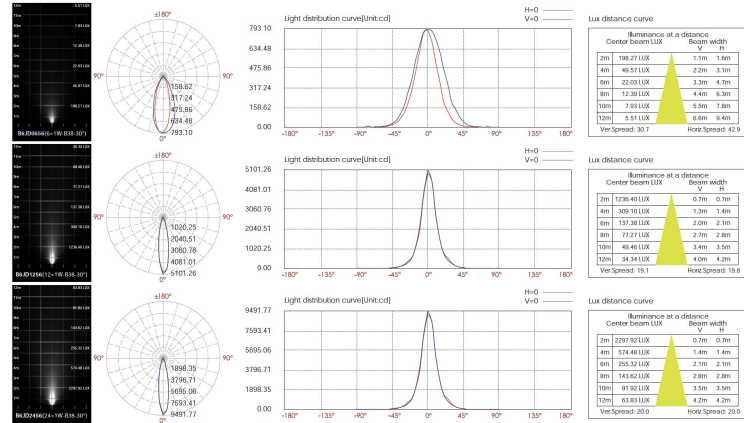

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA