

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



\*CABLE GLAND - IP67 copper and nicked coated

**GENERAL INFORMATION:**

The LUMEXTRA Recessed Wall Luminaire is a durable LED fixture for stairways and pathways. Made from die-cast powder-coated aluminum with a tempered glass lens, it operates on 110–277V and offers IP67 and IK10 protection. With a load capacity over 2000 kg, LUMEXTRA ensures reliable, long-lasting performance in Sanded Dark Gray, Sanded Black, or Sanded White finishes.

**FIXTURE TYPE:**

Recessed Wall Luminaires - Stair/Pathway

**LIGHTING:**

LED

LED

**VOLTAGE:**

110-277V



**MATERIAL:**

12# Die-casting powder coated aluminum

**LENS:**

B1XQ0156: Step tempered clear glass.T=4mm  
B1XT0157, R1XU0125: Step tempered clear glass.T=8mm

**RECESSED SLEEVE:**

B1XQ0156: PC/ABS ALLOYS 182#  
B1XT0157: PC/ABS ALLOYS 185#  
R1XU0125: PC/ABS ALLOYS 184#

**LOADING CAPACITY:**

>2000kg

**IP RATING:**

IP 67

IP67

**IK RATING:**

IK 10

**FINISHING:**

Sanded Dark Gray  
Sanded Black  
Sanded Silver Gray

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BO-LMX-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LMX-KPG-RWL-  
B1XQ0156-K30-  
KAP7037-DIM-B44-20

1

**MODELS:**

CODE -B1XQ0156

DIMENSIONS:

Diameter - Ø: 1.65" (4.2 cm)

Depth - P: 1.7" (4.4 cm)

LIGHT SOURCE:

LED / 1 x 1W / 54 mA / 28 lm / 110-277V / CRI 80

CODE -B1XT0157

DIMENSIONS:

Diameter - Ø: 2.28" (5.8 cm)

Depth - P: 2" (5.3 cm)

LIGHT SOURCE:

LED / 1 x 2W / 108 mA / 60 lm / 110-277V / CRI 80

CODE -R1XU0125

DIMENSIONS:

Diameter - Ø: 2.75" (7 cm)

Depth - P: 4.3" (11 cm)

LIGHT SOURCE:

LED / 1 x 5W / 265 mA / 237 lm / 110-277V / CRI 80

2

**CCT OPTIONS:**

-K30 3000K

-CUS Custom on request\*

3

**FINISH OPTIONS:**

-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9022 Sanded Silver Gray

4

**DIMMING OPTIONS:**

-DIM 1-10V



-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

-B1XQ0156

Ø: 1.65" (4.2 cm)

1.7" (4.4 cm)





1.5"  
(3.8 cm)

-B1XT0157

Ø: 2.28" (5.8 cm)

2" (5.3 cm)





1.7"  
(4.4 cm)

-R1XU0125

Ø: 2.75" (7 cm)

4.3" (11 cm)



2"  
(5.2 cm)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:



\*CABLE GLAND - IP67 copper and nicked coated

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-LMX-KPG-RWL-  
B1XQ0156-K30-  
KAP7037-DIM-B44-20

**5 MOUNTING SLEEVE CHARACTERISTIC:**

available only for  
**-B1XQ0156 model**  
**-B44-20 20°**


available only for  
**-B1XT0157 model**  
**-B34D-30 30°**

available only for  
**-R1XU0125 model**  
**-R7-18 18°**  
**-R7-24 24°**  
**-R7-32 32°**


**6 RECESSED SLEEVE: (included)**



**7 DIAGRAM OF INSTRUCTION:**

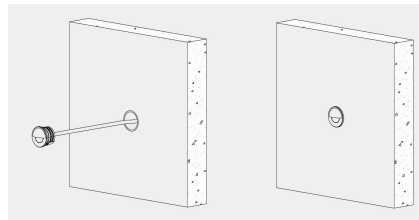

**8 PHOTOMETRIC INFO:**

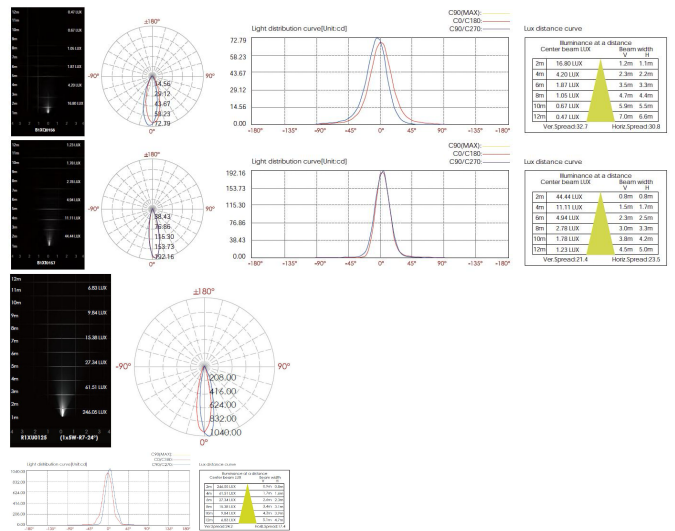

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA