



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The FANNY Surface Mounted Wall Luminaire is a compact floodlight built for durability and performance. Made from 12# die-cast aluminum with a tempered glass lens (T=3mm), it provides efficient LED lighting at 110–277V. With a CRI of 80, IP65 weather resistance, and IK06 impact rating, it ensures long-lasting reliability. Finishes include Sanded Bronze, Sanded Dark Gray, Sanded Black, and Sanded White.

FIXTURE TYPE:

Surface Mounted Wall Luminaires - Spotlight

LIGHTING

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

12# Die-casting aluminum finishing

LENS:

Tempered glass.T=3mm

CRI:

80

IP RATING:

IP 65

IP65

IK RATING:

IK 06

FINISHING:

- Sanded Bronze
- Sanded Dark Gray
- Sanded Black
- Sanded White

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

HOW TO ORDER:

CODE:

Example:

CODE: BO-FNY-KPG-SMW-XXX-XXX-XXX-XXX-XXX-XX

BO-FNY-KPG-SMW-
R7DJM0169T-K30-DIM-
KAP7008-R17-12-CA3021-
Mh082

1

MODELS:

CODE -R7DJM0169T

DIMENSIONS:

Diameter - Ø: 3.54" (9 cm)

Depth - P: 6.96" (17.7 cm)

LIGHT SOURCE:

LED / 1 x 16W / 145 mA / 1900 lm / 110-277V

CODE -R7CJM0171T

DIMENSIONS:

Diameter - Ø: 4.72" (12 cm)

Depth - P: 9" (23 cm)

LIGHT SOURCE:

LED / 1 x 20W / 205 mA / 2596 lm / 110-277V

CODE -R7BJM0176T

DIMENSIONS:

Diameter - Ø: 6.29" (16 cm)

Depth - P: 10.62" (27 cm)

LIGHT SOURCE:

LED / 1 x 40W / 372 mA / 4770 lm / 110-277V

2

CCT OPTIONS:

-K30 3000K

-CUS Custom on request*

3

DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

4

FINISH OPTIONS:

-KAP7008 Sanded Bronze



-KAP7037 Sanded Dark Gray

-RAL 9005 Sanded Black

-RAL9003 Sanded White

-R7DJM0169T



6.96" (17.7 cm)



3.54"
(9 cm)

-R7CJM0171T



9" (23 cm)



4.72"
(12 cm)

-R7BJM0176T

10.62" (27 cm)



9.13"
(23.2 cm)

6.29"
(16 cm)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:

CODE:

Example:
CODE: BO-FNY-KPG-SMW-XXX-XXX-XXX-XXX-XXX-XX

BO-FNY-KPG-SMW-
R7DJM0169T-K30-DIM-
KAP7008-R17-12-CA3021-
Mh082

5 BEAM ANGLE:

available only for -R7DJM0169T model		available only for -R7CJM0171T model		available only for -R7BJM0176T model	
-R17-12	12°	-R19-10	10°	-R16-12	12°
-R17-18	18°	-R19-22	22°	-R16-25	25°
-R17-32	32°	-R19-38	38°	-R16-38	38°

6 ACCESSORIES:

BEVEL CUT HOOD

- CA3021 R7DJM0169T
- CA3020 R7CJM0171T
- CA3019 R7BJM0176T




HONEYCOMB LOUVER


- Mh082 R7DJM0169T
- Mh083 R7CJM0171T
- Mh084 R7BJM0176T



7 DIAGRAM OF INSTRUCTION:

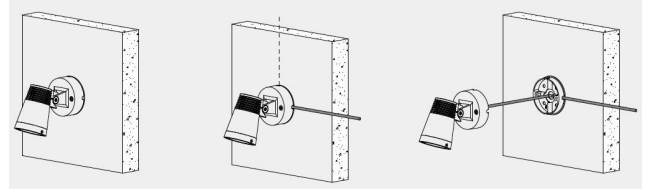

8 PHOTOMETRIC INFO:

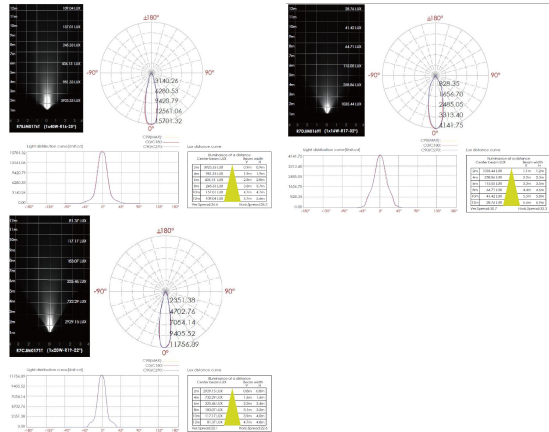

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA