BULLARD OUTDOOR
BUILT for the STORM

VISION
Inground Luminaire - Compact/Mini

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-VS-KPG-IL

FIXTURE TYPE: _____

PROJECT NAME: _____

GENERAL INFORMATION:

Vision is inground LED light, featuring a sleek square form crafted from durable die-casting aluminum with stainless steel finish options, offers both style and durability. With a selected degree of 25° and an R5 reflector, Vision ensures precise and uniform illumination for various applications. Customize your lighting experience with dimming options via 1-10V and DALI.

FIXTURE TYPE:

Inground Luminaires - Compact/Mini

LIGHTING:

LED

VOLTAGE:

110-277V

MATERIAL:

12# Die-casting dark grey powder coated aluminium

CRI:

80

IP RATING:

IP 67

IK RATING:

IK 06

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2026 All Rights Reserved

Updated 02/04/2026

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-VS-KPG-IL

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

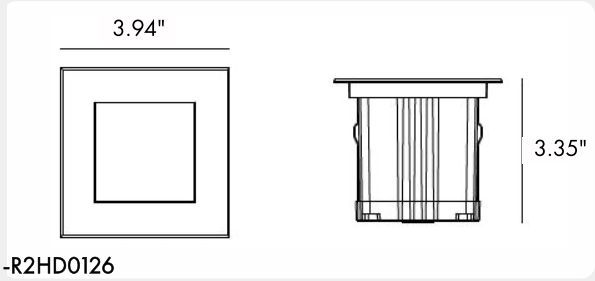

-R2HD0126

LED | 110-277V | IP67 | DALI

HOW TO ORDER:	CODE:
Example: CODE: BO-VS-KPG-IL-XXX-XXX-XXX-XXX-XXX-XXX	BO-VS-KPG-IL-R2HD0126-K30-R5-18-DIM-

1 MODELS:

CODE -R2HD0126

DIMENSIONS:

Width - W: 3.94" (10 cm)

Height - H: 3.35" (8.5 cm)

LIGHT SOURCE:

LED / 1 x 7W / 324 mA / 800 lm / IK 06 / 110-277V

2 CCT OPTIONS:

-K30

-CUS

3 OPTICS:

-R5-18 18°

-R5-25 25°

-R5-40 40°

4 DIMMING OPTIONS:

-DIM 1-10V

-PWM Pulse Width Modulation

-DALI DALI (Digital Addressable Lighting Interface)

5 WATER PROOF SOLUTION: (optional)

-A

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2026 All Rights Reserved

Updated 02/04/2026

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-VS-KPG-IL

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

LED | 110-277V | IP67 | DALI

HOW TO ORDER:	CODE:
Example: CODE: BO-VS-KPG-IL-XXX-XXX-XXX-XXX-XXX-XXX	BO-VS-KPG-IL-R2HD0126-K30-R5-18-DIM-

6 ACCESSORIES:

HONEYCOMB LOUVER (OPTIONAL)

-Mh010

SLEEVE (INCLUDED)

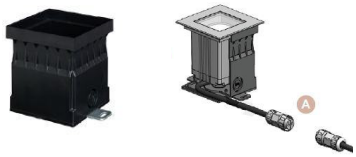

-092#

7 PHOTOMETRIC INFO:







Lux distance curve

Illuminance at a distance		Beam width	
Center beam LUX		H	
2m	458.81 LUX	1.0m	1.0m
4m	114.70 LUX	1.9m	1.9m
6m	50.98 LUX	2.9m	2.9m
8m	28.68 LUX	3.8m	3.8m
10m	18.35 LUX	4.8m	4.8m
12m	12.74 LUX	5.8m	5.8m

Ver.Spread:27.0 Horiz.Spread:27.0

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2026 All Rights Reserved

Updated 02/04/2026