


FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

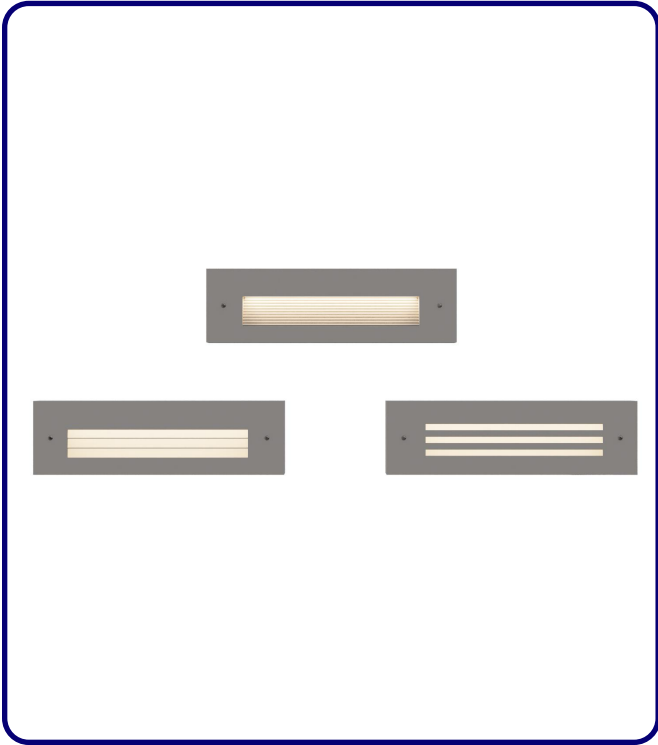

\*CABLE GLAND - IP68 PG-9 PA66

**GENERAL INFORMATION:**

The VERTA Recessed Wall Luminaire is a durable LED fixture for stairways and pathways. Made from die-cast powder-coated aluminum with optional stainless steel covers, it features a UV-stable, fireproof lens for reliable performance. Operating on 110–277V with a CRI of 80, VERTA is IP65 and IK09/IK10 rated, ensuring durability and style in Sanded Dark Gray, Sanded Black, or Gunstock Brown Light finishes.

**FIXTURE TYPE:**

Recessed Wall Luminaires - Stair/Pathway Luminaires

**LIGHTING:**

LED

LED

**VOLTAGE:**

110-277V



**MATERIAL:**

12# Die-casting powder coated aluminum

**COVER:**

D1BA1517A, D1BB4232: 12# Die-casting aluminum

D1BC4232: Made by hard chrome-plated stainless steel 316L#

**LENS:**

D1BC4232, D1BB4232: UVstop & Fireproof PC T=3mm:

D1BA1517A: UVstop & Fireproof PC T=1.5mm:

**RECESSED SLEEVE:**

PC/ABS ALLOYS 074#

**IP RATING:**

IP 65

IP65

**IK RATING:**

IK 9 / IK 10

**FINISHING:**

Sanded Dark Gray

Sanded Black

Sanded Silver Gray

Gunstock Brown Light (only for D1BC4232 model)

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr

Richland, MI 49083


USA

FIXTURE TYPE: \_\_\_\_\_


PROJECT NAME: \_\_\_\_\_

NOTES:


**-D1BA1517A**

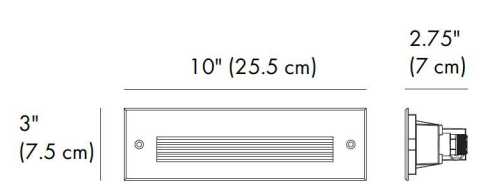

**-D1BB4232**

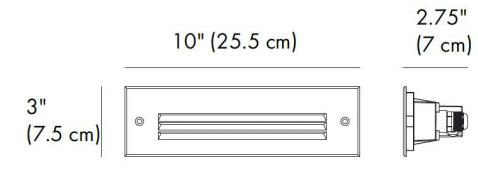

**-D1BC4232**

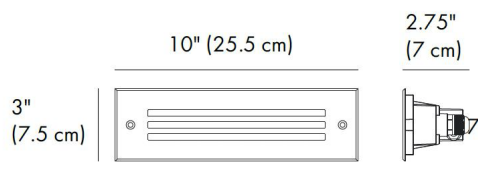

**HOW TO ORDER:** \_\_\_\_\_ **CODE:** \_\_\_\_\_

Example:  
CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-VRT-KPG-RWL-  
D1BA1517A-K30-  
KAP7037-DIM

**1**

**MODELS:**

**CODE -D1BA1517A**

DIMENSIONS:

Length - L: 10" (25.5 cm)  
 Height - H: 3" (7.5 cm)  
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 15 x 0.2W / 200 mA / 113 lm / 110-277V / IK 10

**CODE -D1BB4232**

DIMENSIONS:

Length - L: 10" (25.5 cm)  
 Height - H: 3" (7.5 cm)  
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 200 mA / 47 lm / 110-277V / IK 10

**CODE -D1BC4232**

DIMENSIONS:

Length - L: 10" (25.5 cm)  
 Height - H: 3" (7.5 cm)  
 Depth - P: 2.75" (7 cm)

LIGHT SOURCE:

LED / 42 x 0.09W / 220 mA / 150 lm / 110-277V / IK 09

**2**

**CCT OPTIONS:**

-K30 3000K  
 -CUS Custom on request\*

**3**

**FINISH OPTIONS:**

-KAP7037 Sanded Dark Gray  
 -RAL 9005 Sanded Black  
 -KAP 9022 Sanded Silver Gray  
 -KAP 03 Gunstock Brown Light (only for D1BC4232 model)

sales@gordonbullard.com  
 www.bullardoutdoor.com  
 1-877-964-4646




991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

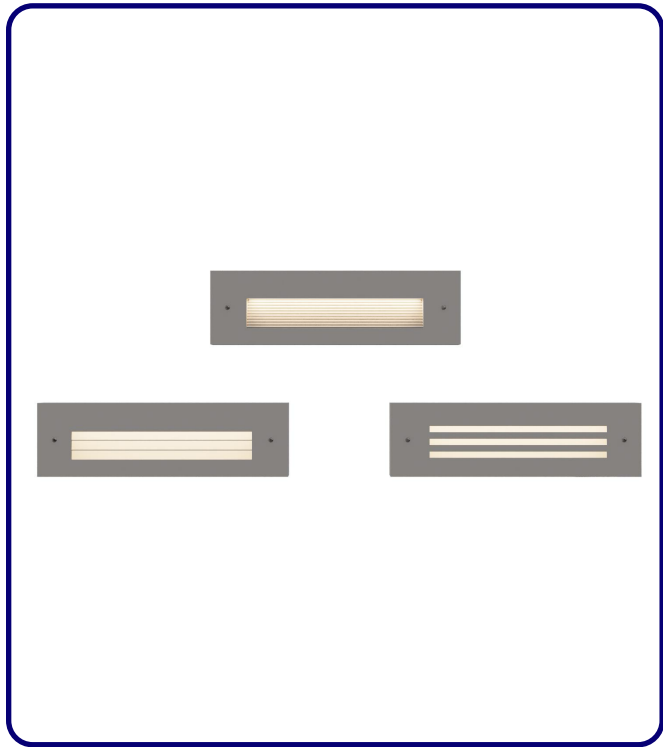

**HOW TO ORDER:**

**CODE:**


Example:  
CODE: BO-VRT-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-VRT-KPG-RWL-  
D1BA1517A-K30-  
KAP7037-DIM


**4 DIMMING OPTIONS:**

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


**5 MOUNTING SLEEVE CHARACTERISTIC:**

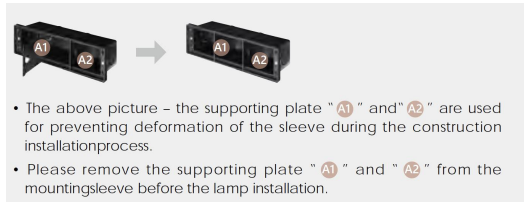


**6 RECESSED SLEEVE: (included)**

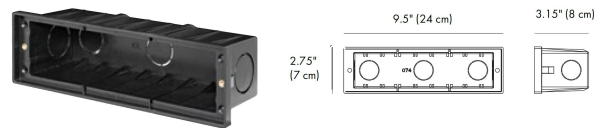

**7 DIAGRAM OF INSTRUCTION:**

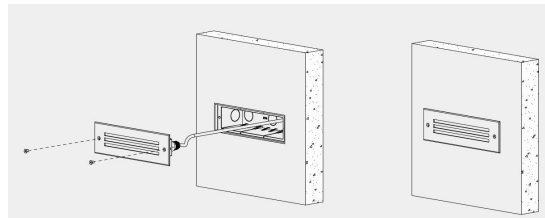

**8 PHOTOMETRIC INFO:**

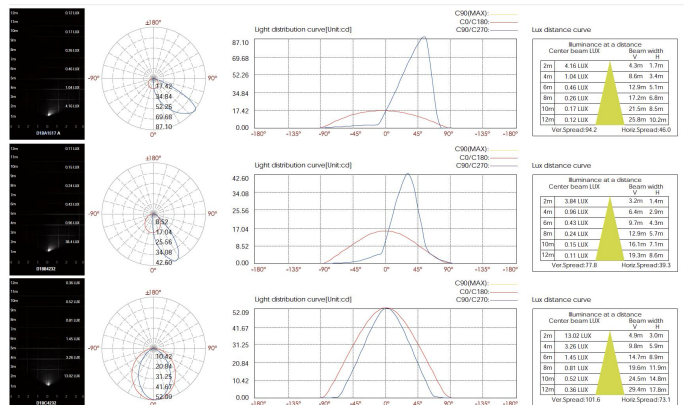

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA