



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The INFILUM Recessed Wall Luminaire is a versatile and durable LED fixture designed for round and square wall applications in stair and pathway lighting. Constructed from die-cast powder-coated aluminum, it features a glass lens for even illumination and operates on 110–277V. With IP65 weather protection and impact ratings ranging from IK05 to IK10, INFILUM delivers dependable performance in outdoor and architectural environments. Available in Sanded Dark Gray, Sanded Black, and Sanded White finishes, it combines elegant design with rugged functionality for modern lighting projects.

FIXTURE TYPE:

Recessed Wall Luminaires - Round / Square

LIGHTING:

LED

LED

VOLTAGE:

110-277V



MATERIAL:

12# Die-casting powder coated aluminum

CABLE GLAND:

IP67

RECESSED SLEEVE:

PC/ABS ALLOYS 150#

IP RATING:

IP 65

IP65

IK RATING:

IK 05 / IK 06 / IK 07 / IK 10

FINISHING:

Sanded Dark Gray
Sanded Black
Sanded White

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:

CODE:

Example:
CODE: BO-NFL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-NFL-KPG-RWL-
D1CY0934-K30-
KAP7037-DIM

1

MODELS:

CODE -D1CY0934

DIMENSIONS:

Length - L: 4.72" (12 cm)
Height - H: 4.72" (12 cm)
Depth - P: 2.35" (6 cm)

LIGHT SOURCE:

LED / 9 x 0.5W / 250 mA / 199 lm / CRI 80 / IK 07

CODE -D1CX0934

DIMENSIONS:

Length - L: 4.72" (12 cm)
Height - H: 4.72" (12 cm)
Depth - P: 2.25" (5.7 cm)

LIGHT SOURCE:

LED / 9 x 0.5W / 250 mA / 172 lm / CRI 80 / IK 07


CODE -D1CZ0934

DIMENSIONS:

Length - L: 4.72" (12 cm)
Height - H: 4.72" (12 cm)
Depth - P: 1.7" (4.3 cm)

LIGHT SOURCE:

LED / 9 x 0.5W / 250 mA / 94 lm / CRI 80 / IK 06

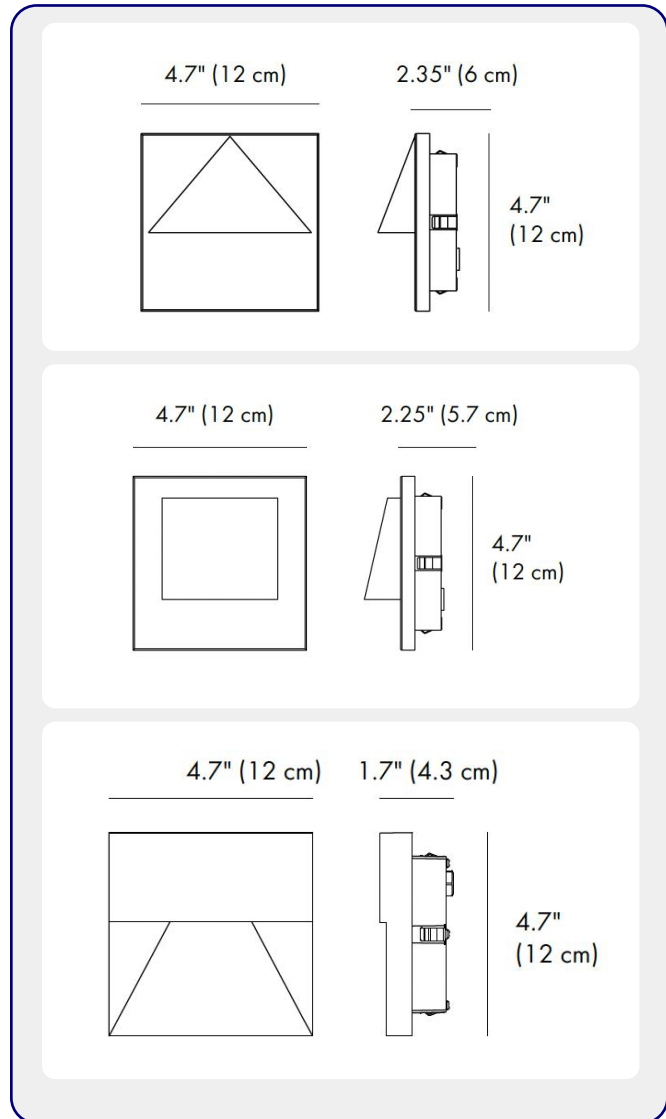

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

HOW TO ORDER:


CODE:

Example:
CODE: BO-NFL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-NFL-KPG-RWL-
D1CY0934-K30-
KAP7037-DIM

1

MODELS:

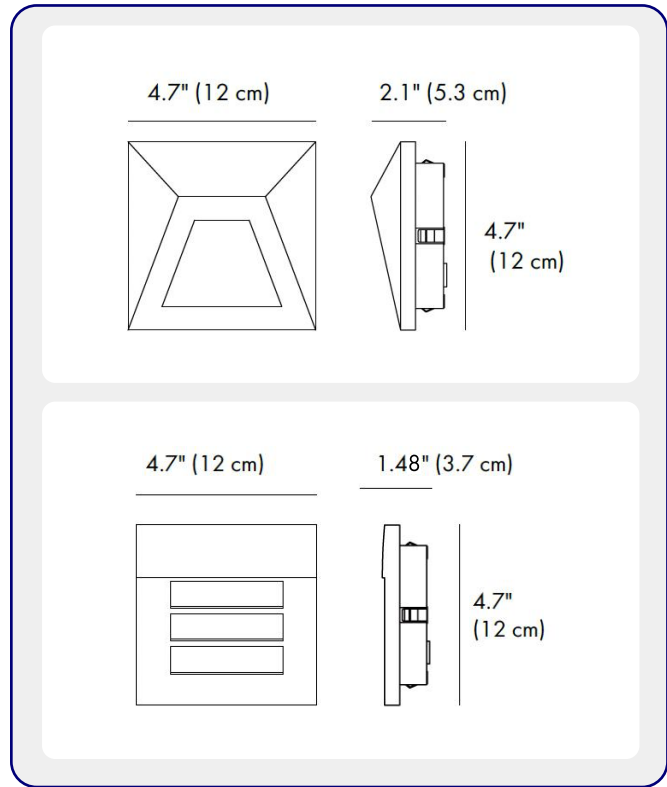

CODE -D1CN1434

DIMENSIONS:

Length - L: 4.72" (12 cm)
Height - H: 4.72" (12 cm)
Depth - P: 2.1" (5.3 cm)

LIGHT SOURCE:

LED / 14 x 0.5W / 291 mA / 150 lm / CRI 80 / IK 10

CODE -D1CW2832

DIMENSIONS:

Length - L: 4.72" (12 cm)
Height - H: 4.72" (12 cm)
Depth - P: 1.48" (3.7 cm)

LIGHT SOURCE:

LED / 28 x 0.08W / 105 mA / 84 lm / CRI 80 / IK 05

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:

CODE:

Example:
CODE: BO-BLZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-NFL-KPG-RWL-
D1CY0934-K30-
KAP7037-DIM

2 CCT OPTIONS:

- K30 3000K
- CUS Custom on request*


3 FINISH OPTIONS:

- KAP7037 Sanded Dark Gray
- RAL 9005 Sanded Black
- RAL9003 Sanded White

4 DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


5 RECESSED SLEEVE: (included)

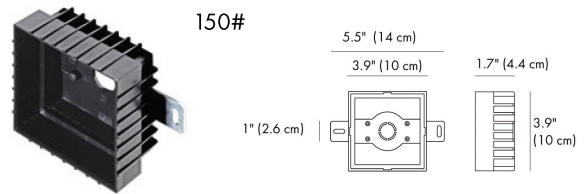

6 FEATURES:



• Front cover without screws



• Use the high-strength clips for fixation. (please refer remark 1)

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:




HOW TO ORDER:

CODE:


Example:
CODE: BO-BLZ-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-NFL-KPG-RWL-
D1CY0934-K30-
KAP7037-DIM

7 DIAGRAM OF INSTRUCTION:

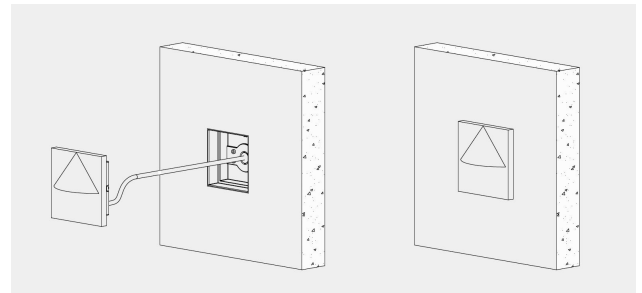

8 PHOTOMETRIC INFO:

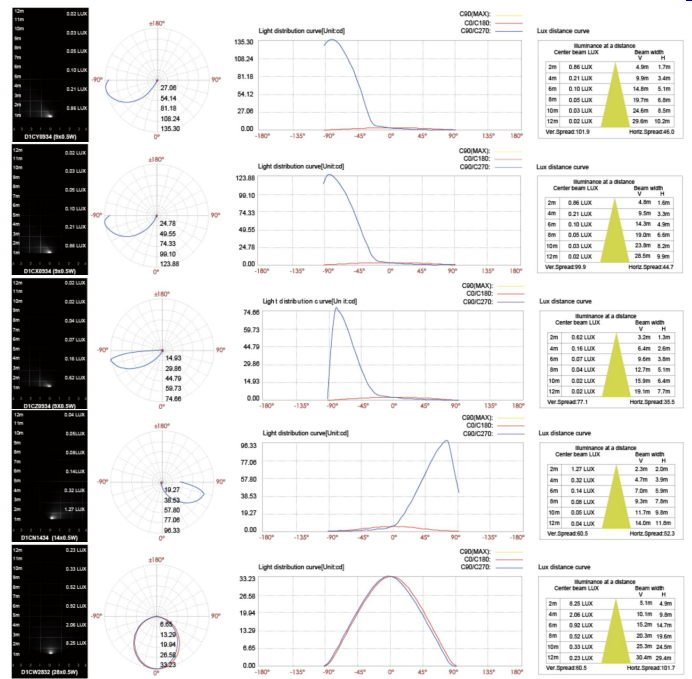

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA