



FIXTURE TYPE: _____

PROJECT NAME: _____



- Water temperature between -4°F and 104°F; depth less than 1 meter

GENERAL INFORMATION:

The KORA Underwater Spotlight by Bullard Outdoor is a durable, high-efficiency LED fixture made from chrome-plated stainless steel (SUS 316#). Designed for pools and fountains, it offers excellent heat management, automatic overheat protection, and superior reliability with IP68 waterproof and IK 09/10 impact ratings.

FIXTURE TYPE:

Pool/Fountain Luminaires - Spotlights

LIGHTING:

LED

LED

VOLTAGE:

DC 24

MATERIAL:

Hard chromeplated molding shaped stainless steel SUS 316L#

LENS:

OPTICS lens. efficiency≥85%

CABLE GLAND:

IP68 PG-11 copper with nickel-coated

PCB:

Excellent heat conductivity aluminum, coefficient of heat Conductivity≥2.0w/mk

BUILT-IN OVERHEAT SENSOR SYSTEM:

Automatic Shutdown at 75°C

CRI:

80

IP RATING:

IP 68

IP68

IK RATING:

IK 09 / IK 10

sales@gordonbullard.com

www.bullardoutdoor.com

1-877-964-4646



991 South Gull Lake Dr


Richland, MI 49083

USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

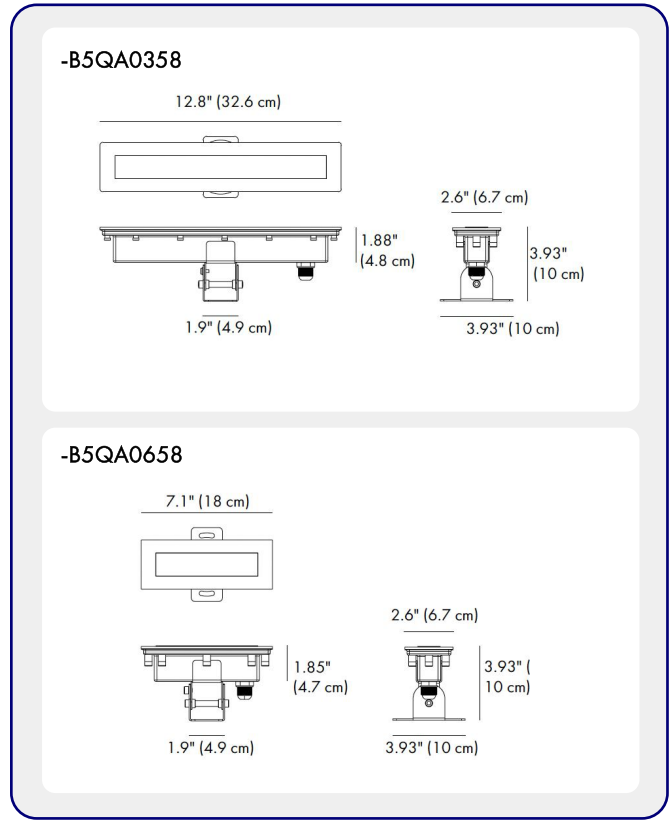

HOW TO ORDER: _____ CODE: _____

Example:
CODE: BO-KR-KPG-PFL-XXX-XXX-XXX-XXX-XXX-XXX

BO-KR-KPG-PFL-B5QA0658-K30-B27-15-DIM-B

1 MODELS:

CODE -B5QA0358

DIMENSIONS:

Length - L: 12.8" (32.6 cm)
Height - H: 3.93" (10 cm)
Width - W: 2.6" (6.7 cm)

LIGHT SOURCE:

LED / 6 × 3W / 950 mA / 1578 lm / DC 24 / IK 10

2 CCT OPTIONS:

DIMENSIONS:

Length - L: 7.1" (18 cm)
Height - H: 3.93" (10 cm)
Width - W: 2.6" (6.7 cm)

LIGHT SOURCE:

LED / 3 × 3.4W / 535 mA / 1000 lm / DC 24 / IK 09

3 BEAM ANGLE:

-K30 3000K
-CUS Custom on request*

4 DIMMING OPTIONS:

-B27-15 15°
-B27-25 25°
-B27-30 30°

-DIM 1-10V
-PWM Pulse Width Modulation
-DALI DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:


CODE:

Example:
CODE: BO-KR-KPG-PFL-XXX-XXX-XXX-XXX-XXX-XXX


BO-KR-KPG-PFL-B5QA0658-K30-B27-15-DIM-B

5 WATER PROOF SOLUTION: (optional)

- A Water-Stopper(Included)**
A IP-67 water-stopper is added in the end of luminaires as standard assembly which is also an important system for water resistance.
- B IP68 Jiffy quick plug/socket connector(Option)**
A IP-68 connector is as an optional assembly and ensures that water vapor will not enter into luminaires directly.

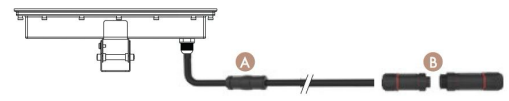

6 PHOTOMETRIC INFO:

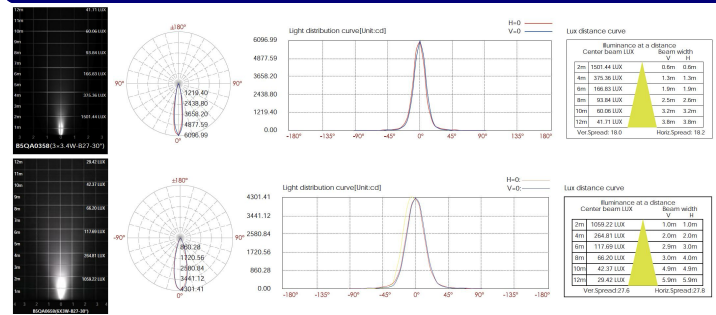

LED

110-277V

IP68

DALI

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA