




FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

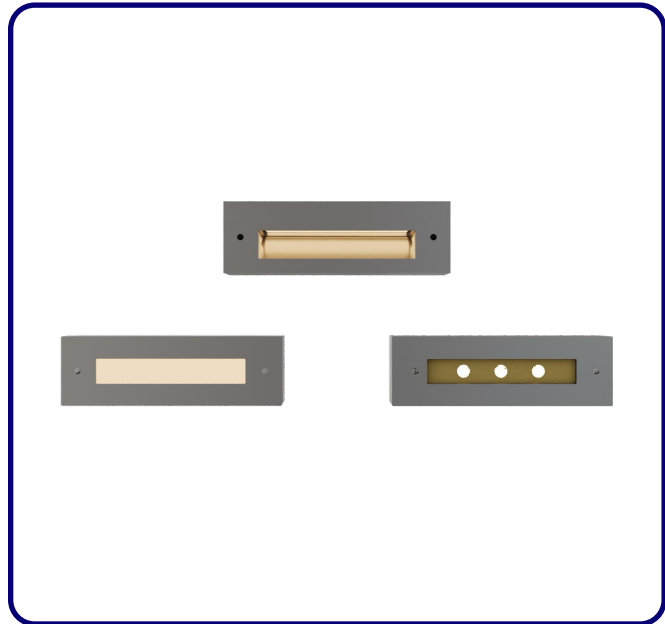

\*CABLE GLAND - IP68 PG-9 PA66

**GENERAL INFORMATION:**

The BRILL Recessed Wall Luminaire is a versatile LED fixture designed for stairways and pathways. Constructed from die-cast dark gray powder-coated aluminum, it operates on 110–277V and features tempered or high-transparency glass lenses for uniform illumination. With IP65, plus an IP68 cable gland for added protection, BRILL ensures durability and performance in outdoor environments.

**FIXTURE TYPE:**

Recessed Wall Luminaires - Stair/Pathway

**LIGHTING:**

LED

LED

**VOLTAGE:**

110-277V

110-277V

**MATERIAL:**

12# Die-casting dark grey powder coated aluminum

**COVER:**

Stainless Steel 316L#

**LENS:**

C1FL0357: Step-grinding and tempered high transparency glass.T=8mm  
D1FL1014: Tempered frosted step glass.T=8mm, white prin  
D1FL1234: UVstop & Fireproof PC T=4mm

**RECESSED SLEEVE:**

PC/ABS ALLOYS 076#

**IP RATING:**

IP 65

IP65

**IK RATING:**

IK 08 / IK 09 / IK 10

**FINISHING:**

Sanded Dark Gray  
Sanded Black  
Sanded Silver Gray

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_


NOTES:

**HOW TO ORDER:** \_\_\_\_\_ **CODE:** \_\_\_\_\_

Example:  
CODE: BO-BRL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-BRL-KPG-RWL-  
C1FL0357-K30-  
KAP7037-DIM

**1 MODELS:**

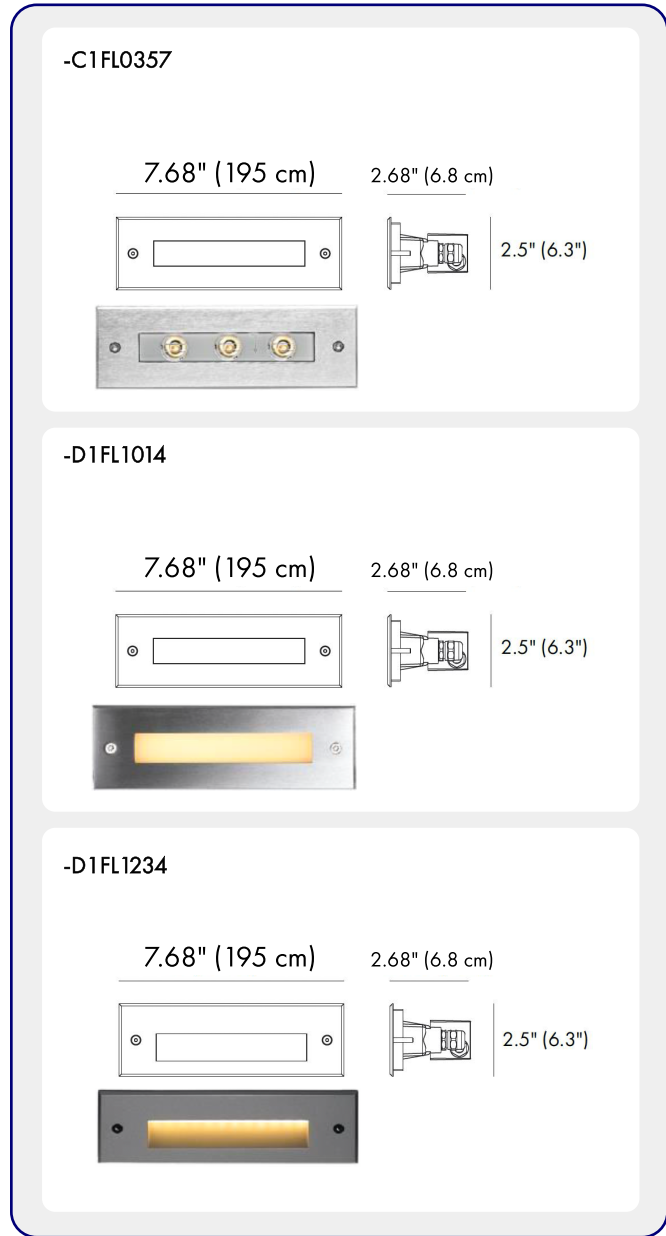

**CODE -C1FL0357**

DIMENSIONS:

Length - L: 7.68" (195 cm)  
 Height - H: 2.5" (6.3 cm)  
 Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 3 x 2W / 217 mA / 400 lm / CRI 80 / 35° x 45° / IK 08

**CODE -D1FL1014**

DIMENSIONS:

Length - L: 7.68" (195 cm)  
 Height - H: 2.5" (6.3 cm)  
 Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 10 x 0.2W / 114 mA / 50 lm / CRI 80 / IK 09

**CODE -D1FL1234**

DIMENSIONS:

Length - L: 7.68" (195 cm)  
 Height - H: 2.5" (6.3 cm)  
 Depth - P: 2.68" (6.8 cm)

LIGHT SOURCE:

LED / 12 x 0.2W / 52 mA / 70 lm / CRI 80 / IK 10

**2 CCT OPTIONS:**

-K30 3000K  
 -CUS Custom on request\*

**3 FINISH OPTIONS:**

-KAP7037 Sanded Dark Gray  
 -RAL 9005 Sanded Black  
 -RAL9022 Sanded Silver Gray


sales@gordonbullard.com  
 www.bullardoutdoor.com  
 1-877-964-4646

991 South Gull Lake Dr  
 Richland, MI 49083  
 USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

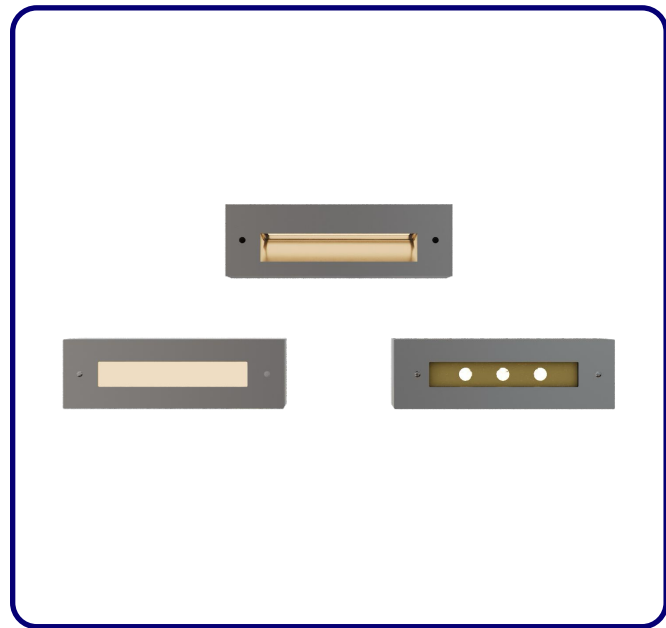

\*CABLE GLAND - IP68 PG-9 PA66

**HOW TO ORDER:**

**CODE:**


Example:  
CODE: BO-BRL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-BRL-KPG-RWL-  
C1FL0357-K30-  
KAP7037-DIM

**4 DIMMING OPTIONS:**

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)


**5 RECESSED SLEEVE: (included)**




**6 RECESSED SLEEVE CHARACTERISTIC:**



**7 DIAGRAM OF INSTRUCTION:**

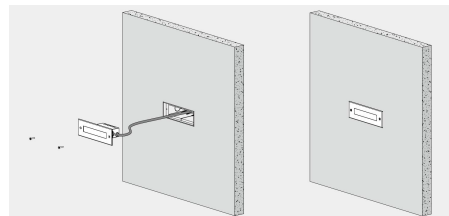

**8 PHOTOMETRIC INFO:**

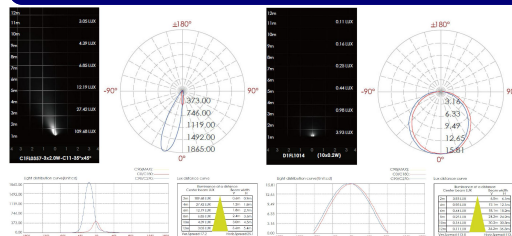

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA