



FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_



**GENERAL INFORMATION:**

The SENTO MAX Linear Wall Washer by Bullard Outdoor delivers powerful, uniform illumination for architectural and façade lighting applications. Constructed from extruded aluminum with a high-performance powder-coated finish, it offers exceptional durability and corrosion resistance in outdoor environments. The tempered glass lens (T=4mm) ensures optimal light transmission and protection for the integrated LED system, providing consistent brightness and color with a CRI of 80. Operating on a 110–277V universal input, the SENTO MAX is rated IP65 for weather resistance and IK06 for impact protection. This linear fixture embodies Bullard’s engineering precision and modern design — Built for the Storm.

**FIXTURE TYPE:**

Linear Wall Washer

**LIGHTING**

LED

LED

**VOLTAGE:**

110-277V



**MATERIAL:**

Extruded aluminum

**LENS:**

Tempered Glass.T=4mm

**CRI:**

80

**IP RATING:**

IP 65

IP65

**IK RATING:**

IK 06

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646




991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:

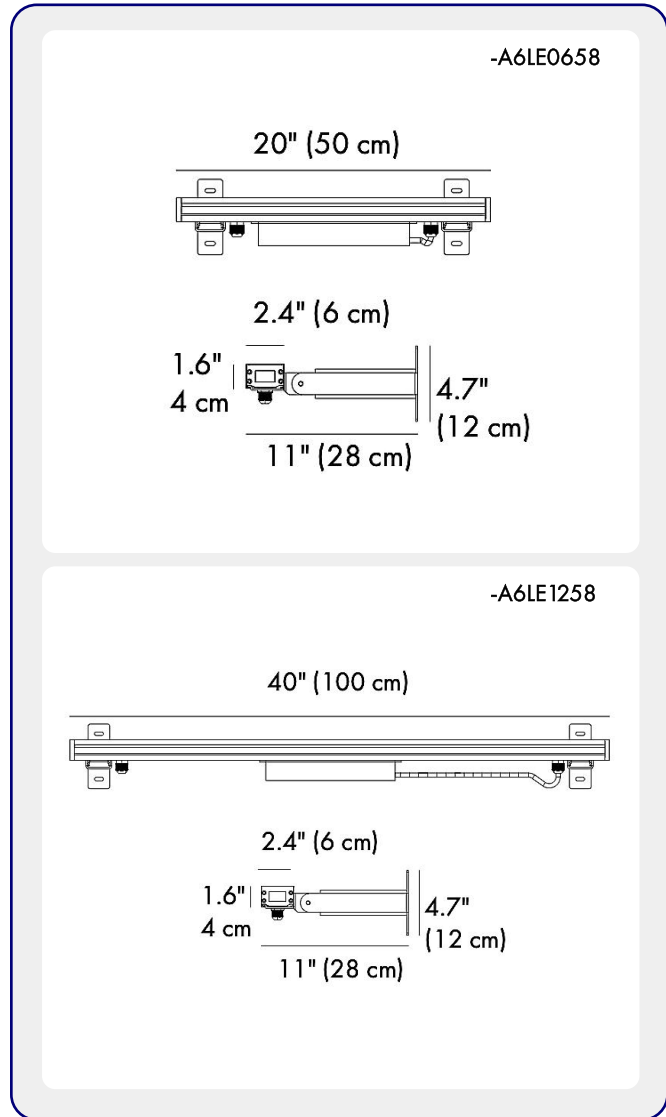

**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNTX-KPG-WW-  
A6LE0658-K30-A24-15-  
DIM-6005#-EXBR-B

**1 MODELS:**

**CODE -A6LE0658**

DIMENSIONS:

Length - L: 20" (50 cm)  
Width - W: 2.4" (6 cm)  
Height - H: 1.6" (4 cm)  
Depth - P: 11" (28 cm)  
Bracket Height - H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 6 × 4W / 1200 mA / 2236 lm / 110-277V

**CODE -A6LE1258**

DIMENSIONS:

Length - L: 40" (100 cm)  
Width - W: 2.4" (6 cm)  
Height - H: 1.6" (4 cm)  
Depth - P: 11" (28 cm)  
Bracket Height - H: 4.7" (12 cm)

LIGHT SOURCE:

LED / 12 × 4W / 2380 mA / 4417 lm / 110-277V

**2 CCT OPTIONS:**

-K30 3000K  
-CUS Custom on request\*

**3 BEAM ANGLE:**

-A24-15 15°

**4 DIMMING OPTIONS:**

-DIM 1-10V  
-PWM Pulse Width Modulation  
-DALI DALI (Digital Addressable Lighting Interface)

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:





**HOW TO ORDER:**

**CODE:**


Example:  
CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNTX-KPG-WW-  
A6LE0658-K30-A24-15-  
DIM-6005#-SUS201#-B


**5 ACCESSORIES: (optional)**

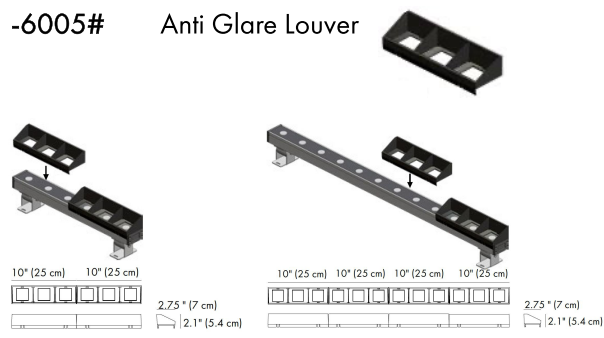

**6 WATER PROOF SOLUTION: (optional)**

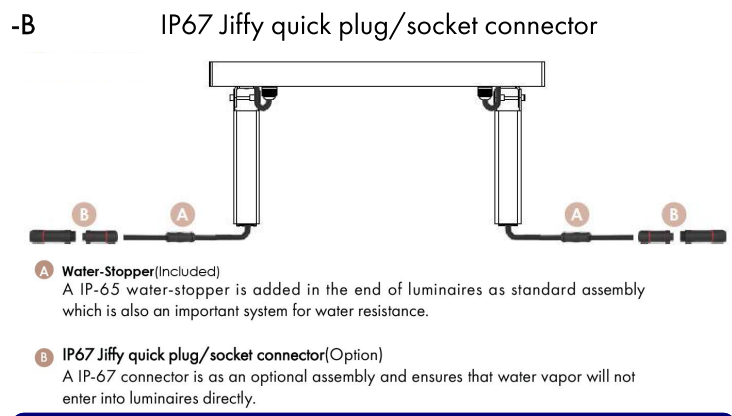

**7 CONNECTION**

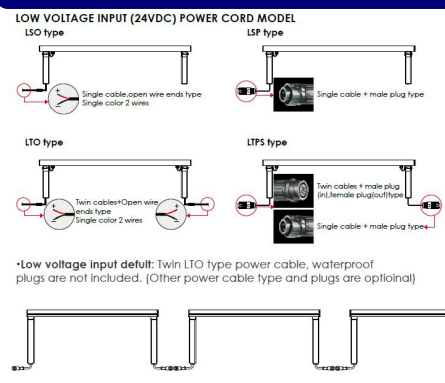

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA

FIXTURE TYPE: \_\_\_\_\_

PROJECT NAME: \_\_\_\_\_

NOTES:






**HOW TO ORDER:**

**CODE:**

Example:  
CODE: BO-SNTX-KPG-WW-XXX-XXX-XXX-XXX-

BO-SNTX-KPG-WW-  
A6LE0658-K30-A24-15-  
DIM-6005#-SUS201#-B




**8 PHOTOMETRIC INFO:**

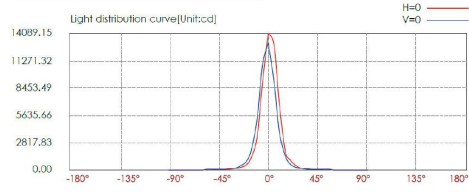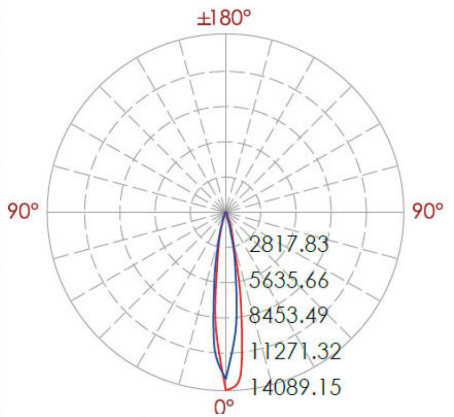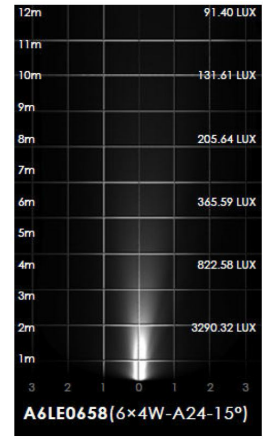

Lux distance curve

Center Beam LUX	Beam width V	H
2m	0.6m	0.5m
4m	1.2m	1.1m
6m	1.7m	1.6m
8m	2.3m	2.2m
10m	2.9m	2.7m
12m	3.5m	3.3m

Ver.Spread: 16.6 Horiz.Spread: 15.4

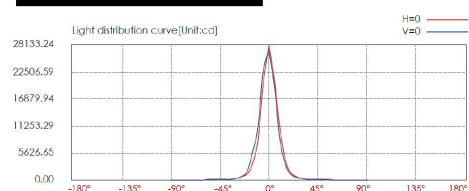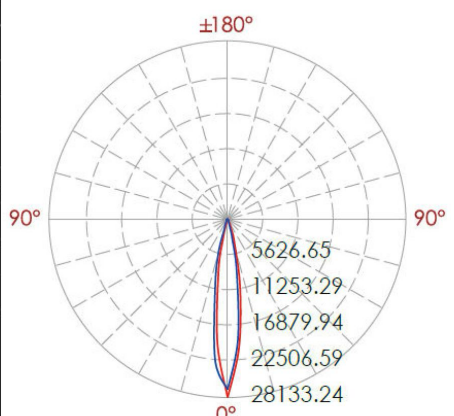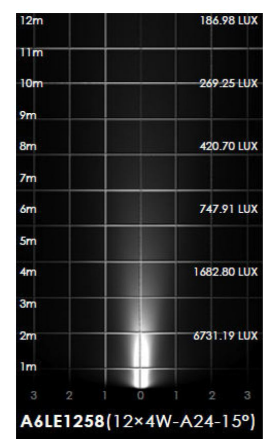

Lux distance curve

Center Beam LUX	Beam width V	H
2m	0.6m	0.6m
4m	1.1m	1.1m
6m	1.7m	1.7m
8m	2.3m	2.3m
10m	2.8m	2.8m
12m	3.3m	3.4m

Ver.Spread: 16.6 Horiz.Spread: 16.0

sales@gordonbullard.com  
www.bullardoutdoor.com  
1-877-964-4646



991 South Gull Lake Dr  
Richland, MI 49083  
USA