BULLARD OUTDOOR
BUILT for the STORM

GLOW
Recessed Wall Luminaires
Round / Square

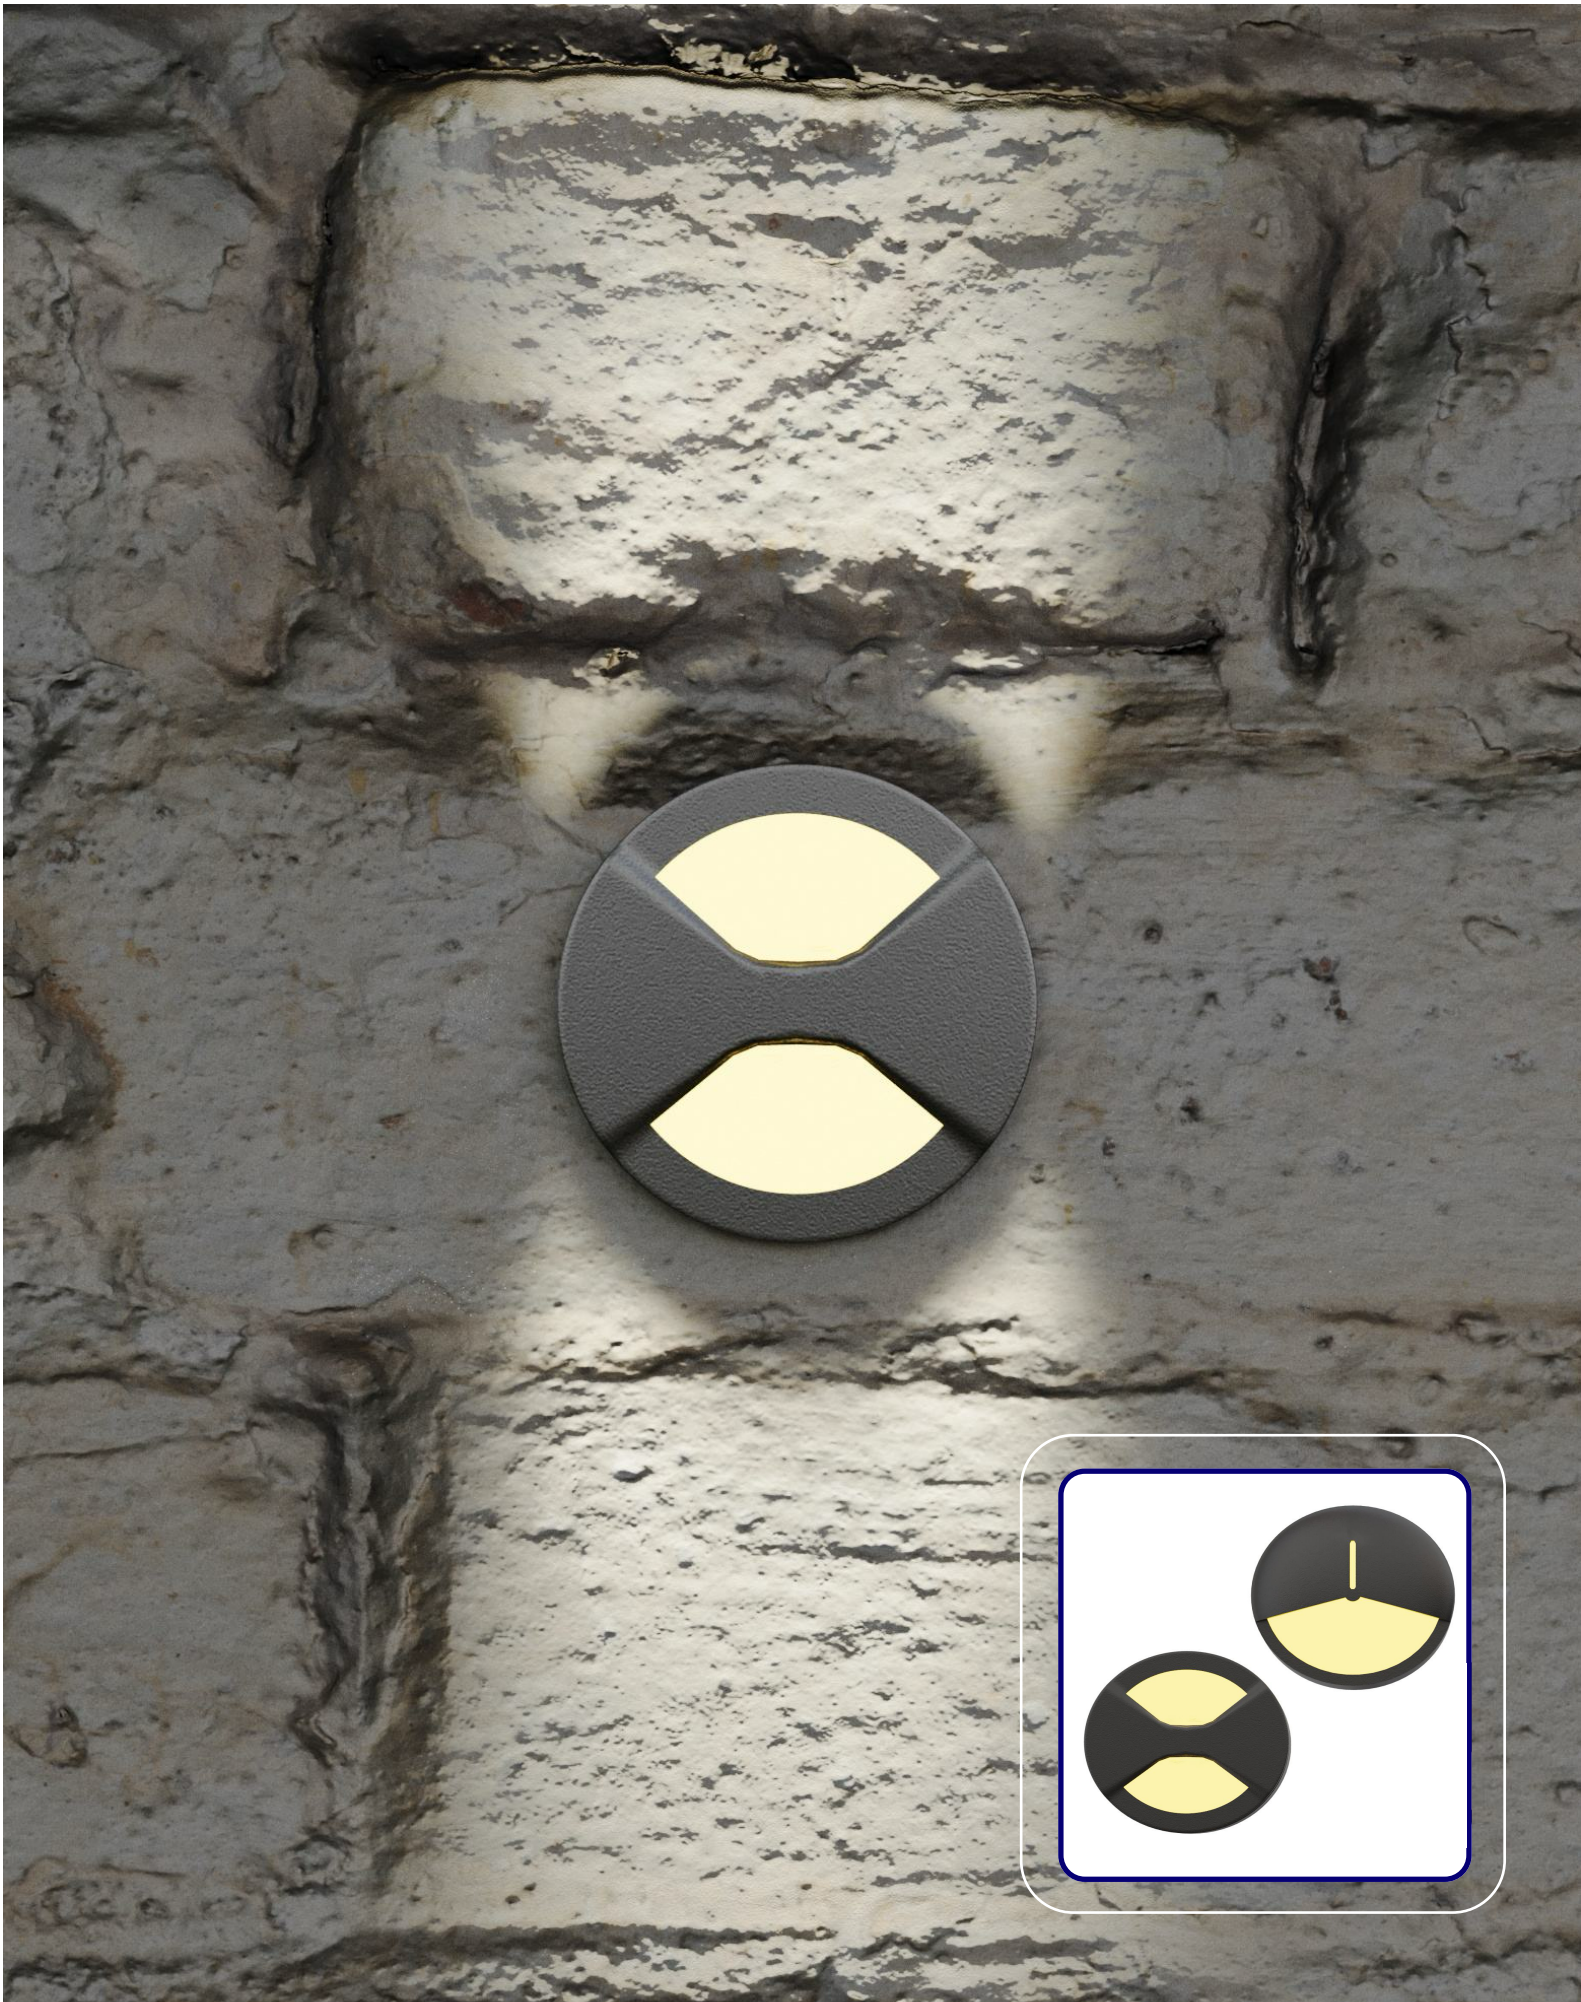

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-GL-KPG-RWL

FIXTURE TYPE: _____

PROJECT NAME: _____

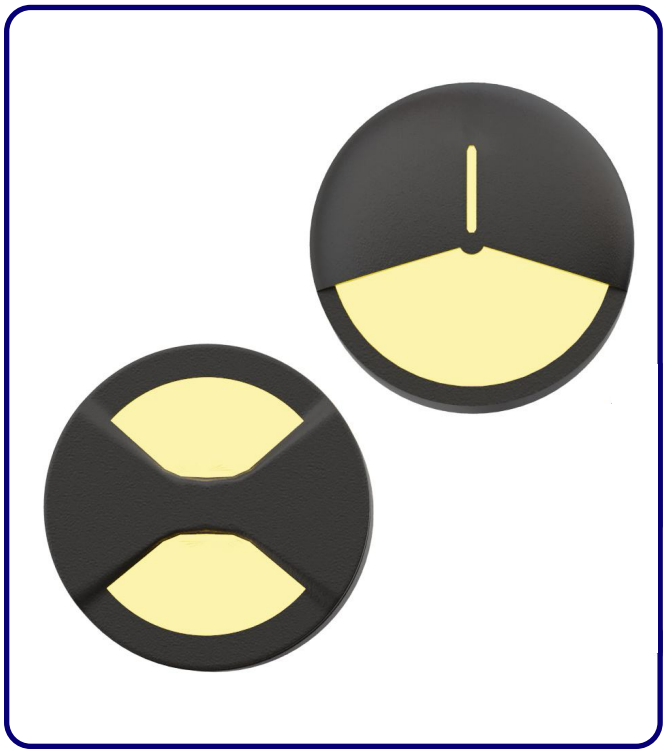

GENERAL INFORMATION:

The GLOW Recessed Wall Luminaires is a versatile and durable lighting fixture designed for both round and square wall installations in pathways, stairs, and architectural spaces. Constructed from #12 die-cast dark gray powder-coated aluminum, it combines strength with a refined modern design. The fixture features a UV-stable and fireproof PC lens (T=2.5mm) that ensures reliable light diffusion and long-term performance. Operating on 110–277V with energy-efficient LED technology, it delivers consistent illumination with a CRI of 80, ideal for enhancing visibility and ambiance. Rated IP65 and IK09, GLOW offers excellent resistance to water, dust, and impact, making it perfect for outdoor or demanding environments. Available in Sanded Dark Gray, Sanded Black, and Sanded White finishes, it brings both style and durability to contemporary architectural lighting.

FIXTURE TYPE:

Recessed Wall Luminaires - Round and Square Wall Luminaires

LIGHTING:

LED

VOLTAGE:

110-277V

MATERIAL:

12# Die-casting dark grey powder coated aluminum

LENS:

UVstop & Fireproof PC T=2.5mm

CRI:

80

IP RATING:

IP 65

IK RATING:

IK 09

FINISHING:

Sanded Dark Gray
Sanded Black
Sanded White

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.
© Bullard & Company 2026 All Rights Reserved

Updated 02/27/2026

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-GL-KPG-RWL

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

-D1KT3032

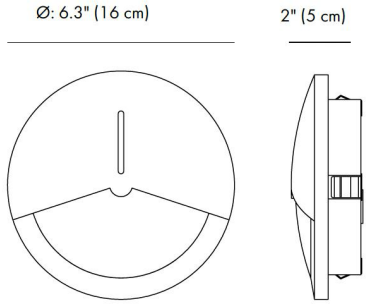

-D1KW3032

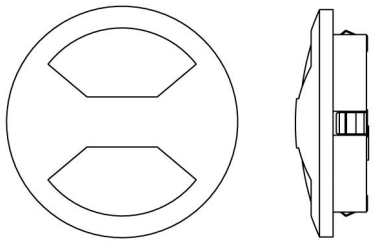

LED | 110-277V | IP65 | DALI

HOW TO ORDER:	CODE:
Example: CODE: BO-GL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX	BO-GL-KPG-RWL-D1KT3032-K30-KAP7037-DIM

1 MODELS:

CODE -D1KT3032

DIMENSIONS:

Diameter - Ø: 6.3" (16 cm)

Width - W: 2" (5 cm)

LIGHT SOURCE:

LED / 30 x 0.07W / 135 mA / 118 lm / 110-277V

CODE -D1KW3032

DIMENSIONS:

Diameter - Ø: 6.3" (16 cm)

Width - W: 2" (5 cm)

LIGHT SOURCE:

LED / 30 x 0.07W / 135 mA / 142 lm / 110-277V

2 CCT OPTIONS:

-K30	3000K
-CUS	Custom on request*

3 FINISH OPTIONS:

-KAP7037	Sanded Dark Gray
-RAL 9005	Sanded Black
-RAL9003	Sanded White

4 DIMMING OPTIONS:

-DIM	1-10V
-PWM	Pulse Width Modulation
-DALI	DALI (Digital Addressable Lighting Interface)

5 DIAGRAM OF INSTRUCTION:

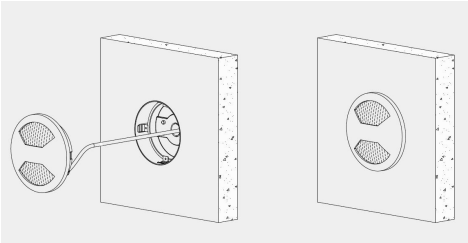

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2026 All Rights Reserved

Updated 02/27/2026

BULLARD OUTDOOR
BUILT for the STORM

CODE: BO-GL-KPG-RWL

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

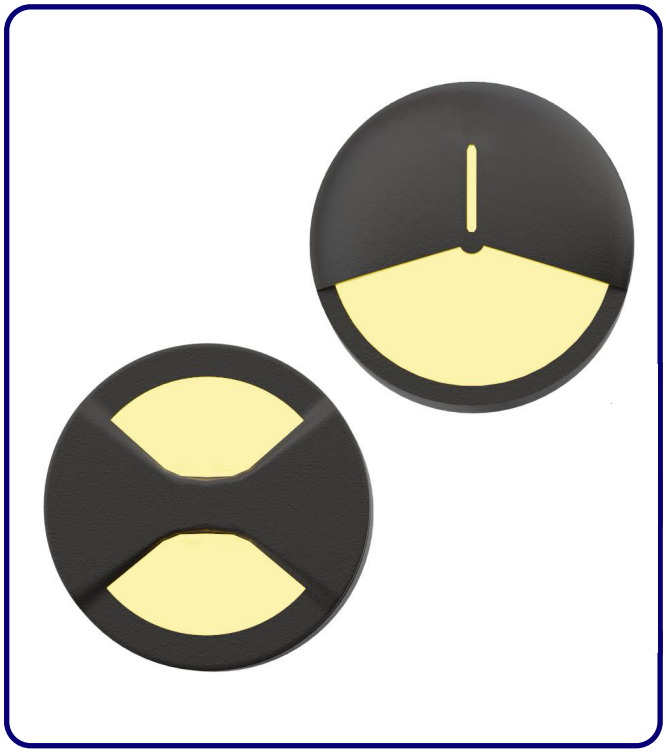

LED | 110-277V | IP65 | DALI

HOW TO ORDER: | **CODE:**

Example:
CODE: BO-GL-KPG-RWL-XXX-XXX-XXX-XXX-XXX-XX

BO-GL-KPG-RWL-D1KT3032-K30-KAP7037-DIM

6 RECESSED SLEEVE: (included)

148#



7 FEATURES:

Front cover without screws

Use the high-strength clips for installation and fixation. (please refer remark 1 & 2)

8 PHOTOMETRIC INFO:

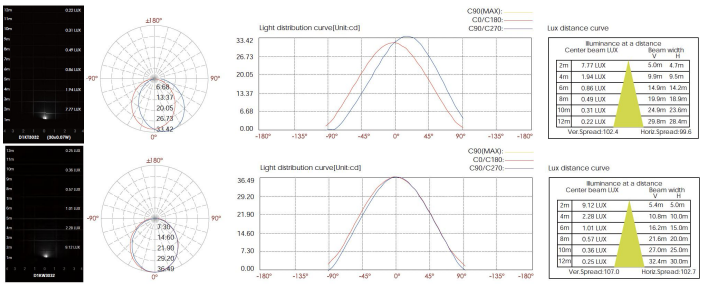

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646

991 South Gull Lake Dr
Richland, MI 49083
USA

Due to the dynamic nature of lighting products and the associated technologies, luminaire data on all specification sheets is subject to change at the discretion of Gordon Bullard LLC and associated companies.

© Bullard & Company 2026 All Rights Reserved

Updated 02/27/2026