



FIXTURE TYPE: _____

PROJECT NAME: _____



GENERAL INFORMATION:

The Berill is an in-ground lighting fixture powered by LEDs and made from die-cast aluminum. It is available in three sizes and comes with a Sanded Black finish option. The voltage range is 110-277V. Additionally, it is equipped with an IP67 water stopper, which is included as a standard assembly at the end of the luminaires. The consumption varies from 18.5W to 44.5W.

FIXTURE TYPE:

Inground Luminaires - Adjustable Beam Angle

LIGHTING:

LED

LED

VOLTAGE:

110-277V

110-277V

MATERIAL:

12# Die-casting dark grey powder coated aluminum

CRI:

80

IP RATING:

IP 68

IP68

IK RATING:

IK 08 / 10

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646




991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:

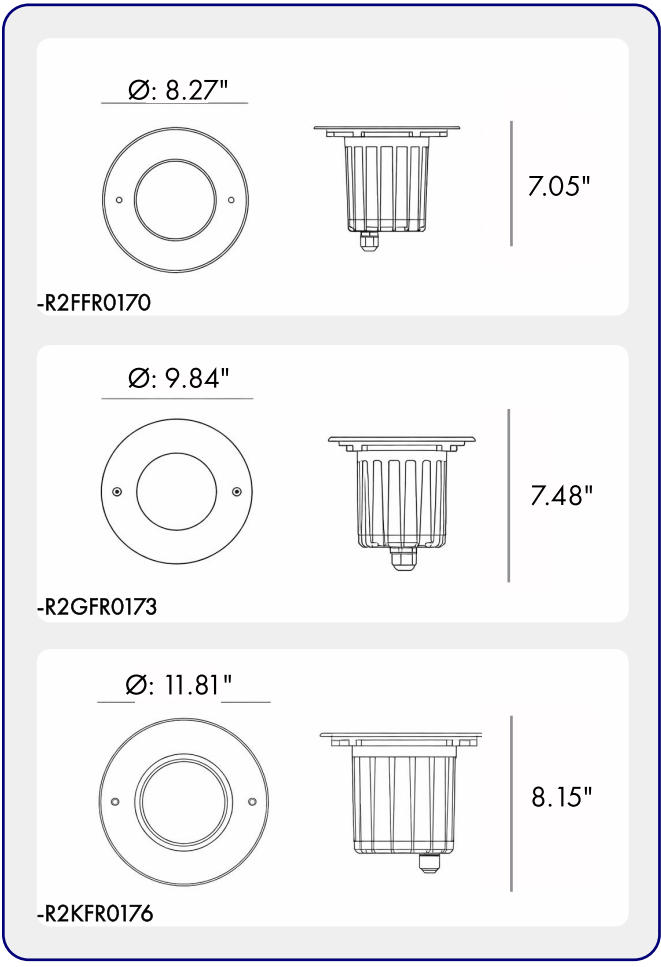

HOW TO ORDER: _____ CODE: _____

Example:
CODE: BO-BL-KPG-IL-XXX-XXX-XXX-XXX-XXX-XXX

BO-BL-KPG-IL-R2FFR0170-K30-R19-10-DIM-

1 MODELS:

CODE -R2FFR0170

DIMENSIONS:

Diameter - Ø: 8.27" (21 cm)
Height - H: 7.05" (17.9 cm)

LIGHT SOURCE:

LED / 1 x 18W / 160 mA / 1834 lm / IK 08 / 110-277V

CODE -R2GFR0173

DIMENSIONS:

Diameter - Ø: 9.84" (25 cm)
Height - H: 7.48" (19 cm)

LIGHT SOURCE:

LED / 1 x 25W / 240 mA / 3001 lm / IK 10 / 110-277V

CODE -R2KFR0176

DIMENSIONS:

Diameter - Ø: 11.81" (30 cm)
Height - H: 8.15" (20.7 cm)

LIGHT SOURCE:

LED / 1 x 40W / 372 mA / 4425 lm / IK 10 / 110-277V

2 CCT OPTIONS:

-K30 3000K
-CUS Custom on request*

3 BEAM ANGLE:

available only for -Ø: 8.27" size		available only for -Ø: 9.84" size		available only for -Ø: 11.81" model	
-R19-10	10°	-R16-12	12°	-R29-8	8°
-R19-22	22°	-R16-25	25°	-R29-24	24°
-R19-38	38°	-R16-38	38°	-R29-38	38°

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:



HOW TO ORDER:

CODE:


Example:
CODE: BO-BL-KPG-IL-XXX-XXX-XXX-XXX-XXX-XXX

BO-BL-KPG-IL-R2FFR0170-K30-R19-10-DIM-

4 DIMMING OPTIONS:

- DIM 1-10V
- PWM Pulse Width Modulation
- DALI DALI (Digital Addressable Lighting Interface)

5 WATER PROOF SOLUTION: (optional)

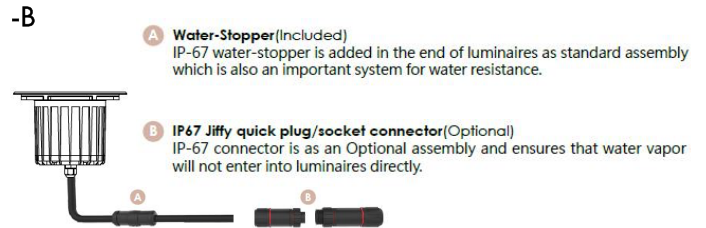

6 ACCESSORIES:

- HONEYCOMB LOUVER (INCLUDED)
- Mh008 -Ø: 8.27"
 - Mh009 -Ø: 9.84"
 - Mh035 -Ø: 11.81"



SLEEVE (INCLUDED)



- 067# -Ø: 8.27"
- 068# -Ø: 9.84"
- 106# -Ø: 11.81"

sales@gordonbullard.com
 www.bullardoutdoor.com
 1-877-964-4646



991 South Gull Lake Dr
 Richland, MI 49083
 USA

FIXTURE TYPE: _____

PROJECT NAME: _____

NOTES:







HOW TO ORDER: _____ CODE: _____

Example:
CODE: BO-BL-KPG-IL-XXX-XXX-XXX-XXX-XXX-XXX

BO-BL-KPG-IL-R2FFR0170-K30-R19-10-DIM-

7 PHOTOMETRIC INFO:

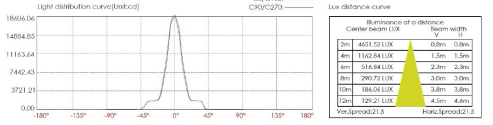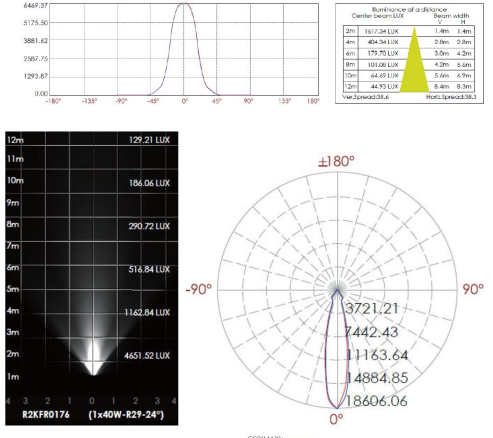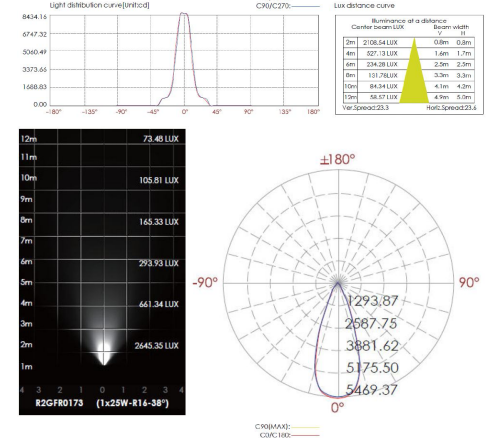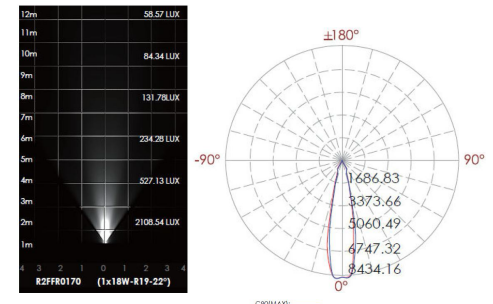

sales@gordonbullard.com
www.bullardoutdoor.com
1-877-964-4646



991 South Gull Lake Dr
Richland, MI 49083
USA